

DIN-Rail Mount Advanced Climate Control Module that installs near HAVC unit to save cost of wiring and to eliminate the need for standard ugly thermostats. being S,BUS enabled it can be controlled flexibly from any DDP panel and any BMS Automation Software. The HVAC2 Module can control Single and Multi stage Units (Heat, Cool, Fan low, High, Medium, VAV 0-10VDC) it can Handle any FCU, AHU, VAV System. With easy labeling space, Comes ready with LED indicator, network health, broadcast button. Good for applications witch require energy saving, Health intelligent control such as residential, commercial or industrial.

[^]*Advanced: HVAC2 Can be Manually Programmed by any Electrician on site without need for PC.

technical data



Power Compatibility

HAVC 80-240VAC, 50/60Hz
 HVAC 12-48VAC Types
 FAN/VAV 0-10VDC
 Power consumption: 20-25mA

System Compatibility

AHU (Air handling Units)
 FCU (Fan Coil Units)
 Single and Multi Stage Cool/
 Heat with 3 Fan Speed (H,M,L)
 VAV Damper Control

Outputs

6 x Separated Switched Relay
 outputs rated at 5A each Ch.

Control IO

3 x Advanced RS485 S-BUS
 serial port links (both train &
 screw link types)

Upgrade IO

1 x mini USB port (to connect to
 special programming board)

User Controls

- LED status indicator/channel
- Diagnostic LED+ BROADCAST

Programming

- Manual Pairing Programming to DDP Panel.
- Advanced Software Configuration & Programming

Compliance

CE Mark Low Voltage
 CE Mark EMC

Operation Protection

- PID Compressor Sequence
- Protecting Delay 0-60min
- Startup Delay 0-25 Sec.
- BUS Rv. Polarity Protection
- BUS Short Circuit Protection

Presets

Accept Celosias and Fahrenheit
 temperature Settings
 Cool temp Preset, Heat Preset.

Installation

- 35mm DIN-Rail Mount Ready
- Wall Mount Ready (4P)

SBUS DC Supply

24VDC with flexible tolerance
 between 8-32VDC. Flexible
 ability to add power supply as
 to be needed any where

Wiring Terminals

10 each is good for 2 x 2.5mm²
 or 1 x 4mm² max conductor size

Operating Environment

0° to 45°C ambient temperature
 20% to 93% RH

Enclosure & Size

Polycarbonate, DIN-rail (4 Unit)


Dimensions & Weight

W 91mm x L 73mm x H 75mm
 Packed weight 0.26 kg


control compatibility **SES**

- Lighting
- Music
- Curtains
- Moods
- Security
- Service
- Color
- Drapes
- Pumps
- Gates


electrical diagram

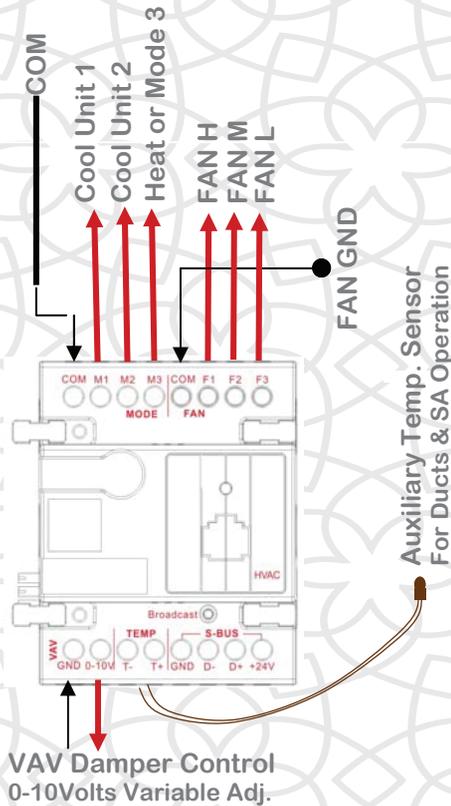


mounting dimensions

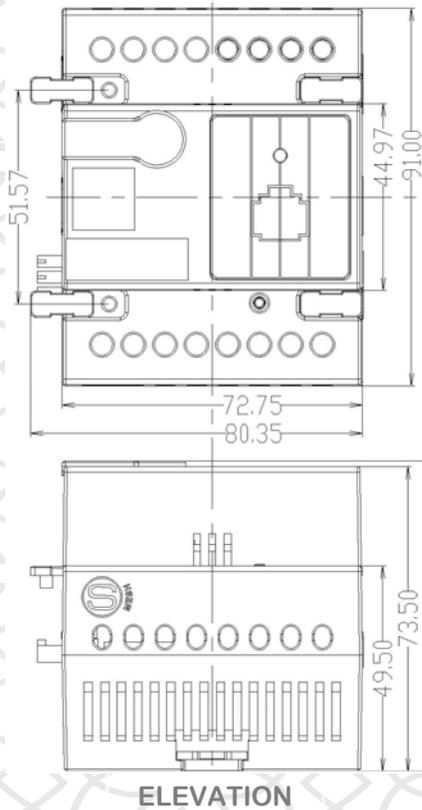

Warning: this is an electrical product, it must be installed only by trained & licensed electrician

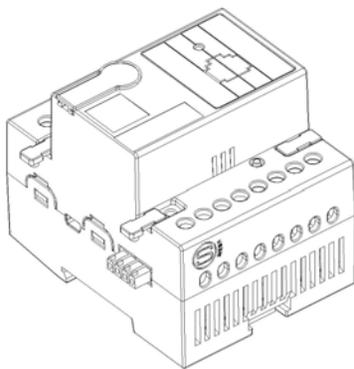


PROSPECTIVE

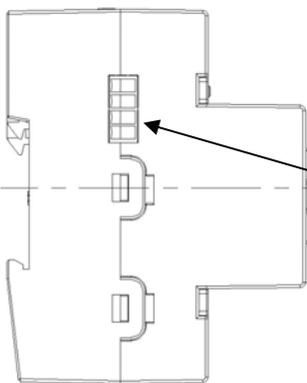

SIDE VIEW

S-BUS connection

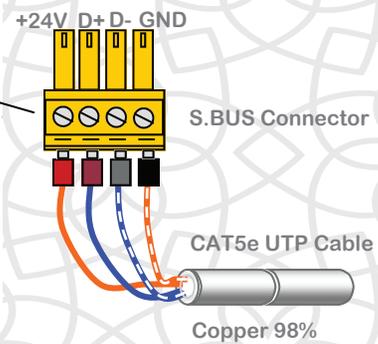

UTP core colors **SES**

S.BUS 24+V	orange
S.BUS GND	w/orange
S.BUS D+	blue
S.BUS D-	w/blue
Spare	green
Spare	w/green
Spare 12+v	brown
Spare 12-V	W/brown